OPULENCE · SUNLESS™



Operation Manual

Version	Date	Revision History
1.1	09-25-2025	Revised per Intertek’s commendation
1.2	10/27/2025	Revised metric height of booth
1.3	11/14/2025	Added weight of equipment and environmental rating
1.4	4/27/2026	Updating Touch Screens photos

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Opulence Sunless Operation Manual

Model: AB1

Please locate and record your serial number below.

The serial number can be found on the back panel of the booth just below the power inlet.

Serial Number: _____

Installation Date: _____

Opulence Sunless

12671 Meadowvale Road Suite D

Elk River MN 55330

info@opulencesunless.com

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Electrical Requirements and International Compatibility

The Opulence Sunless AB1 booth is designed for safe and efficient operation. Ensure your electrical setup matches the specifications below to avoid hazards such as electrical shock, fire, or equipment damage. All installations must comply with local electrical codes (e.g., NEC in the US, IEC in Europe). If your region does not match the standard model, contact Opulence Sunless at info@opulencesunless.com for custom solutions or voltage-specific models.

Standard Model (North America):

Voltage: 115 VAC (nominal 110 -120V)

Frequency: 50 Hz

Amperage: 20 A

Plug Type: NEMA 5-20P

Power Consumption: Approximately 1.5-2kW during operation (dual compressors and heaters)

Grounding: Must be connected to a ground outlet. Use a dedicated 20A circuit to prevent overload.

Environmental Rating:

Indoor Use Only

Operating:

- Temperature: 32°F to 104°F (0°C to +40°C)
- Humidity: 10%–90% RH (Non-Condensing)
- Altitude: 0–6,500 ft (0–2,000 m)

Storage:

- Temperature: –4°F to 140°F (–20°C to +60°C)
- Relative Humidity: 5%–95% RH (Non-Condensing)
- Altitude: 0–33,000 ft (0–10,000 m)

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Contents

Important Safety Instructions 7
Grounding Instructions 7
Electrical Safety 9
Operational Safety 10
Health & Personal Safety 10
FDA and DHA Guidelines 10
A Higher Standard: 11
Features 11
Specifications 12
Overview 13
Installation 13
AB1 Main Components 13
Powering On 14
Password 14
Solutions for AB1 16
Solution Installation 16
Solution Level Reset 17
Changing Solution Type 18
Session Operations 20
Manual Session 20
T-Max Session 21
Spray in Progress 22
Post Manual Session 27
Post T-Max Session 27
Maintenance & Cleaning 28
Cleaning Filters 28
Cleaning the Airbrush Nozzle 30
Maintenance & Cleaning Checklists 31
Tips for a Flawless Glow 32
Before Your Session – Pre-Tan Prep 32
After Your Session – Post-Tan Care 32

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Troubleshooting Guide 34
Power Issues 34
Solution Issues 34
Air System Issues 35

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Important Safety Instructions

It is the responsibility of the owner and operator of the AB1 to comply with all appropriate safety and health laws, as well as other applicable national, state and local laws and ordinances when operating and maintaining the Opulence Sunless equipment.

Warning: Before using the AB1, carefully read this manual and follow ALL instructions.
Warning labels and symbols throughout this manual indicate hazards that may cause serious injury or death if ignored.

Warning: To reduce the risk of burns, electrocution, fire, or injury to persons:

1. The appliance should never be left unattended when plugged in.
2. Close supervision is necessary when the appliance is used by, on, or near children or persons with disabilities.
3. Use this appliance only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturer.
4. Never operate this appliance if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or if it has been dropped into water.
5. Keep the cord away from heated surfaces.
6. Never block the air openings of the appliance. Keep the air openings free of lint, hair, and the like.
7. Never drop or insert any object into any opening.
8. Do not use outdoors or operate where aerosol (spray) products are being used.
9. Connect this appliance to a properly grounded outlet only. See Grounding Instructions.

Exception: Instruction 9 may be omitted for a cord-connected appliance that is not provided with a means for grounding or for an appliance intended for permanent connection.

SAVE THESE INSTRUCTIONS

Grounding Instructions

This appliance must be grounded. In the event of an electrical short-circuit, grounding reduces the risk of electric shock by providing a path of low resistance for the electric current. This appliance is equipped with a cord having a grounding wire with a grounding plug for 20 Amp (see illustration on page 10). The plug must be plugged into an outlet that is properly installed and grounded in compliance with all local codes and ordinances.

DANGER – Improper use of the grounding plug can result in a risk of electric shock. Check with a qualified electrician or service personnel if you are in doubt as to whether the product is properly

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

grounded. Do not modify the plug provided with the appliance, if it will not fit the outlet, have a proper outlet installed by a qualified electrician.

If repair or replacement of the cord or plug is necessary, do not connect the grounding wire to either flat blade terminal. The wire with insulation having an outer surface that is green with or without yellow stripes is the grounding wire.

This appliance is for use on a circuit having a nominal rating of 120 volts and is factory equipped with a specific electric cord and plug to permit connection to a proper electric circuit. Make sure that the appliance is connected to an outlet having the same configuration as the plug. No adapter should be used with this appliance. Do not modify the plug provided if it will not fit the outlet. Have a proper outlet installed by a qualified electrician. If the appliance must be reconnected for use on a different type of electric circuit, the reconnection should be made by qualified service personnel.

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Electrical Safety

- Disconnect Power Before Servicing: Always unplug the AB1 from the electrical supply before servicing, wiring, or opening internal covers. Risk of electrical shock exists if panels are opened while the unit is plugged in.
- Proper Power Connection:
    - U.S. Installations: Use a Nema 5-20P.
    - International Installations: The AB1 must be hardwired into a disconnect box according to local electrical codes.
    - Dedicated Circuit Recommended: Use a dedicated 20A circuit solely for the AB1. Do not share the circuit with other devices. If the plug does not fit your outlet, consult a qualified electrician to safely update wiring.
    - Safe Plug Handling: Always disconnect by grasping the plug head firmly—never pull on the cord.



- Avoid Overloads: Do not use damaged outlets, extension cords, or frayed cords. Overloaded or faulty wiring can cause electric shock or fire. Inspect cords regularly. If damaged, stop use immediately and contact Opulence Sunless Technical Support at (651) 603-4411 for a replacement.
- Protect the Power Cord: Avoid twisting, pinching, closing in doors, or stepping on the cord. Pay attention to plugs, outlets, and the exit point of the cord from the AB1.
- Avoid Moisture: Do not touch the plug or electrical components with wet hands, and do not expose the AB1 to rain or moisture.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Operational Safety

- Adult supervision is required at all times. Children must not operate, play in, or touch the AB1 booth or touchscreen controller.
- Operate the AB1 according to the instructions in this manual. Only use solutions approved by Opulence Sunless. LLC.
- Never use or perform maintenance while drowsy or under the influence of substances.
- The AB1 is not intended for use by people with reduced physical, sensory, or mental capabilities, or lack of experience, unless supervised.
- Never-touch the nozzle housing or vertical arm while it is moving, this contains gears that can pinch fingers.
- Only trained, qualified personnel should perform service or performance adjustments.

Health & Personal Safety

1. Consult a physician before use if you are pregnant, think you may be pregnant, or have diabetes.
2. This appliance may cause discomfort for individuals with claustrophobia or cleithrophobia.
3. Move slowly after applying barrier cream to hands and feet to avoid slipping inside or outside the booth.
4. If experiencing any discomfort (e.g. skin irritation or beathing issues), exit the booth immediately and consult a physician.
5. Do not lean on any part of the appliance.
6. Maximum weight for user is 400 lbs.

Warning: Always follow these safety guidelines. Failure to do so may result in serious injury, electrical shock, or fire.

FDA and DHA Guidelines

The U.S. Food and Drug Administration (FDA) regulates spray tanning products, allowing the use of Dihydroxyacetone (DHA) for external application on the skin. However, the FDA prohibits the inhalation of DHA and its application to mucous membranes, such as the eyes, lips, or nose.

We encourage all professionals in our industry to review the guidelines established by the FDA, which Opulence Sunless, LLC fully endorses. When using DHA tanning solutions, whether in handheld or automated spray booths, the following precautions are recommended:

- Use protective undergarments
- Use nose filters
- Use protective eye shields
- Use lip balm

All these protective items are readily available through Opulence Sunless or your distributor.

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

A Higher Standard:

Professional Flawless Automated Airbrush

Opulence Sunless was founded with a clear goal, to provide simplicity for both owners and customers while delivering the highest quality automated airbrush spray. Our aim is to help your establishment stand out and keep guests coming back. We have constructed our machines using high-quality components designed for durability. Additionally, we are committed to providing our customers with unparalleled service and support.

Each Opulence Sunless AB1 booth is meticulously hand-built and assembled at our facility in Elk River, MN. After several prototypes and years of rigorous testing, we have developed the most user-friendly, high-quality, and easy-to-maintain booth on the market.

Features

Advanced Engineering Inside • For Your Beautiful Outside

- **The waterless advantage** – the AB1 is a waterless booth, so it requires less maintenance, has no funky drain odor, and does not require plumbing.
- **Dual compressors** – Create a fine mist that atomizes at the correct distance, ensuring that only guests are sprayed and minimizing wasted spray, which reduces costs.
- **Patented technology** – The only booth on the market that moves horizontally, providing an unmatched application quality.
- **Open-air design** – Equipped with overspray extractors that remove overspray mist and provide a comfortable, full-body, automated airbrush environment.
- **Recirculation down-draft technology** – Utilizes gravity to pull solutions downward.
- **Custom Engineered Fine-Wide Spray Nozzle** – Delivering a flawless airbrush application with no uneven streaks or marks.
- **Built-in Auto-dry technology** – Drying after every pass to ensure optimal application.
- **Automatic smooth spray arm** – Delivers the exact amount of solution at every position for an even streak-free application.
- **Heated Environment** – For guest comfort.
- **Automated Voice Commands** – Guides guests through the simple positions for less human error. No complicated positions.
- **Handheld add-on option** – Owners can upgrade to a 2-in-1 spray system by adding a handheld spray gun package that attaches to the booth.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Specifications

Minimum recommended room size: (LxWxH) 9’ x 6’ 10” x 9’

Minimum recommended distance from walls: 1’

Booth size: (LxWxH) 61” x 57.25” x 89.5”

Weight: 395 lbs (179.169 kg)





Electrical services: 115VAC (nominal 110-120Vac), 20 AMP, Single Phase, NEMA 5-20P.





Copyright © 2026 Opulence Sunless, LLC All rights reserved.


Overview

The AB1 is a HVLP automatic airbrush system that mixes air and one of four solutions into a fine mist. The mist is then sprayed using a single HVLP spray gun onto the body to produce an even, whole-body application. The solutions are stored in an easy-to-access pull-out drawer.

Installation

There is a separate AB1 installation manual. All AB1 booths must be installed by a Opulence Sunless trained and certified installer.

AB1 Main Components

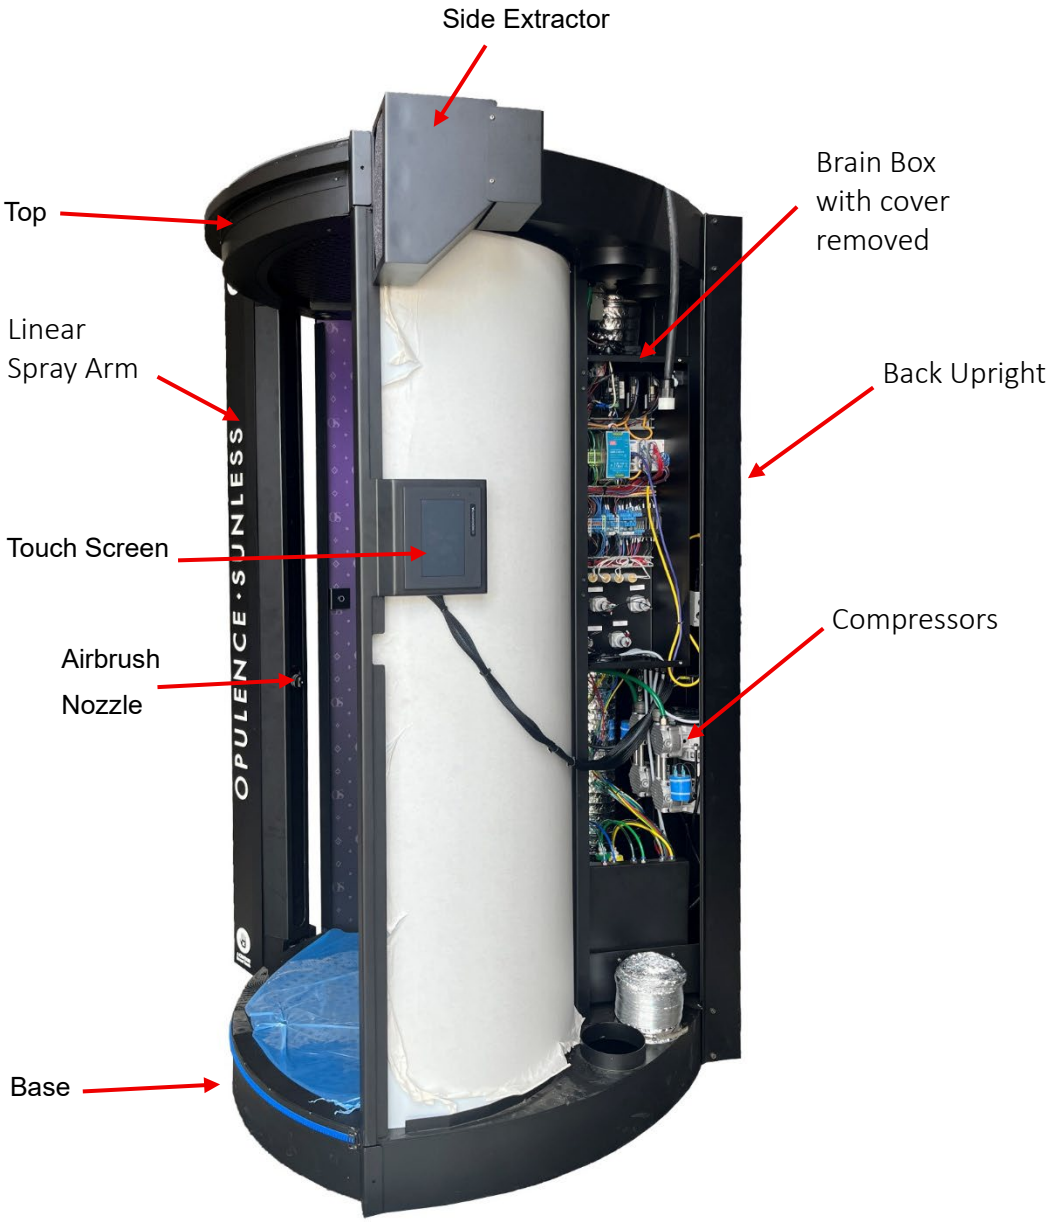

Powering On

Powering on your AB1 is as simple as plugging the power cable into the approved outlet as defined above. Once plugged in, the AB1 will begin the startup process. The lights inside the treatment area will turn on, you will hear a few seconds of static from the speakers, and the screen on the side will start to initialize. If this process does not start, please refer to the troubleshooting steps on page 28.

Password

All passwords are set to “0” by default from the factory.

Spa Password

The Spa password is used to set manual sessions and reset the solution level.

Maintenance Password

The Maintenance password is used to adjust additional settings outlined in this manual.

Changing Password

You can change the Spa and Maintenance password. When changing the passwords, please make note of them in this manual to ensure you always have them.


Spa Password: _____


Maintenance Password: _____

Warning: If you forget your password Opulence Sunless can retrieve it for a fee.

Changing Password Steps:


1. Touch the setting wheel, then “0”, then “ENT”.
2. Touch “Advanced Settings”, then “0”, then “ENT”.

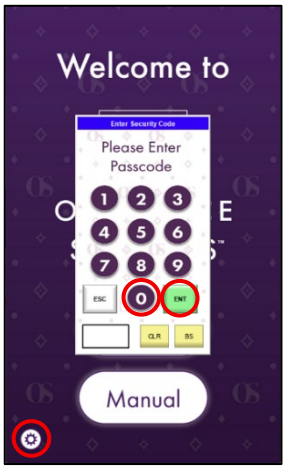


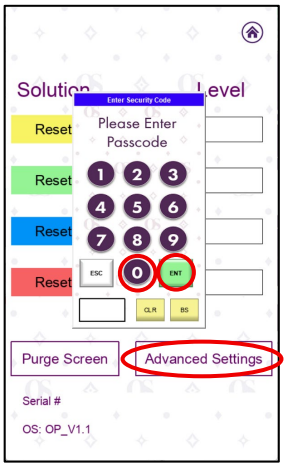


Copyright © 2026 Opulence Sunless, LLC All rights reserved.

3. Touch the password you would like to change at the top of the screen.
4. Enter new password and touch “ENT”. Note password will not display until the “ENT” button has been touched.

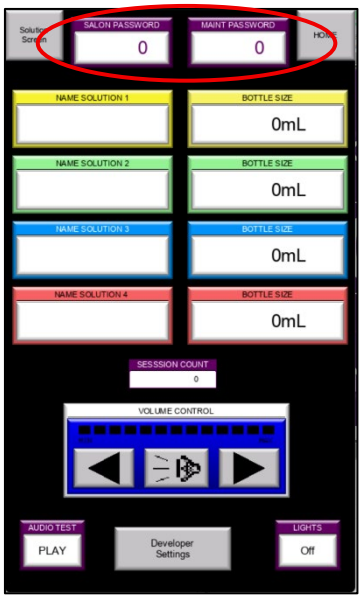

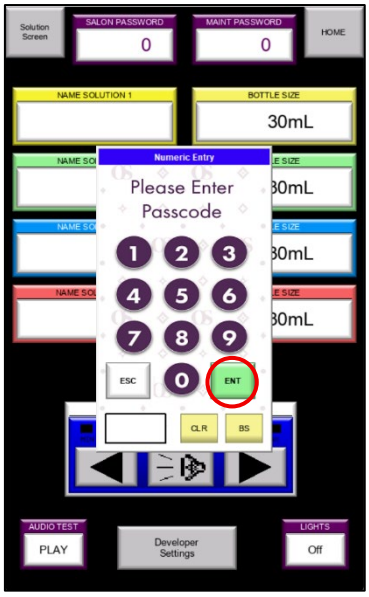

5. Verify your new password is correct.
    a. If it is not, repeat steps starting at Step 3.
    b. If your password is correct, make note of the changes on page 10 of this manual.
6. Click the “Home” button to go back to the main screen.

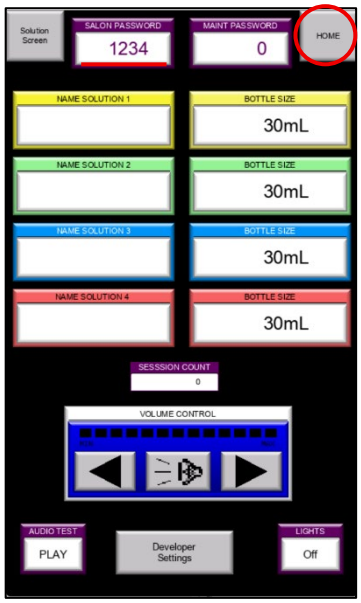

Warning: If you forget your password Opulence Sunless can retrieve it for a fee.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Solutions for AB1

Opulence Sunless understands that there are many excellent solution manufacturers, and it is crucial to offer a solution that you feel confident in. We will feature a list of approved solutions on our website opulencesunless.com. However, if there is a solution you would like that we do not currently endorse, please have the solution manufacturer contact us at info@opulencesunless.com. We can explore the possibility of getting them certified for use with the AB1.

Solution Installation


AB1 contains an easy-to-access pull-out drawer that houses four 1-gallon containers of certified and approved solutions. Our robust bottle keyway ensures that the bottles remain upright and are positioned optimally for the lines to deliver more consistent spray volume.

Only use solutions certified by Opulence Sunless to avoid equipment damage or inconsistent results. Unapproved solutions may void warranty.

Inside the easy-to-access pull-out drawer, you will find four connections: Yellow, Green, Blue, and Red. To replace an empty container with the same solution type, simply remove the quick-disconnect cap from the cap assembly. This is done by pressing the silver release tab on the cap assembly and gently pulling the white disconnect from the cap assembly. Remove the cap assembly from the old bottle and screw it on the top of the new bottle.

Rinse and recycle the old container and insert a new container into the keyway. Reattach the solution lines by simply reinserting the white disconnect on the cap assembly until it clicks.



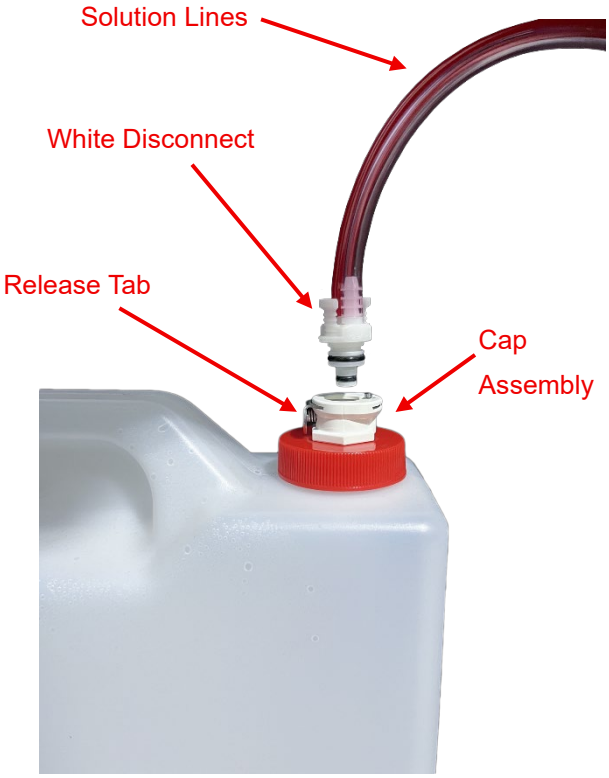


Copyright © 2026 Opulence Sunless, LLC All rights reserved.


Solution Level Reset


When a new solution container is installed in the booth for the same solution type, a solution level reset needs to be performed. Resetting the solution level allows the booth to warn staff when solution is low. To perform a reset, use the following steps.

Solution reset steps:

1. Touch the “Settings” icon and enter the Spa password, then touch “ENT”.
2. Touch the “Reset” button for the solution you replaced.
3. Touch the “Home” icon to return to the main screen.

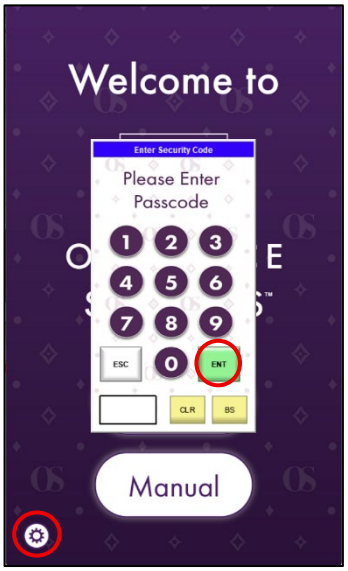

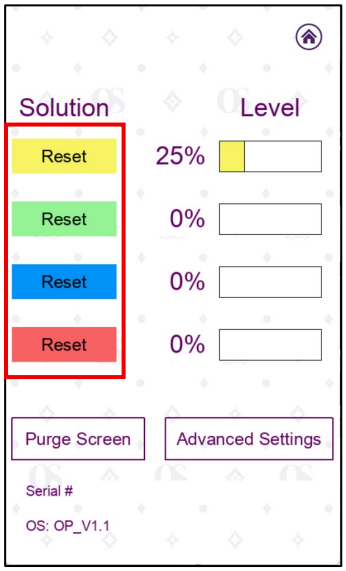

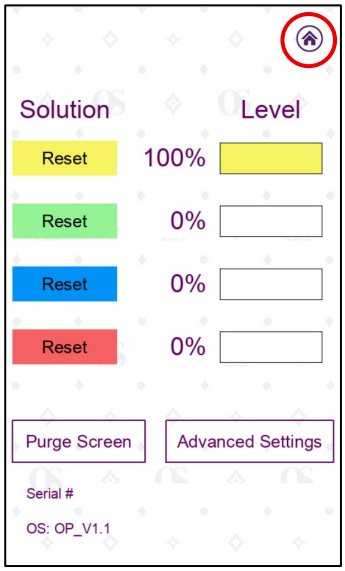



Copyright © 2026 Opulence Sunless, LLC. All rights reserved.


Changing Solution Type

If you are changing the solution from a tanning type to a pre/post type, there are additional steps and setting adjustments that need to be performed.

1. Touch “Settings” icon on the screen and enter the maintenance password.
2. Touch “Purge Screen” and enter the Maintenance password.

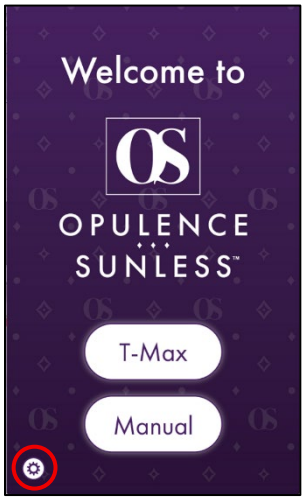

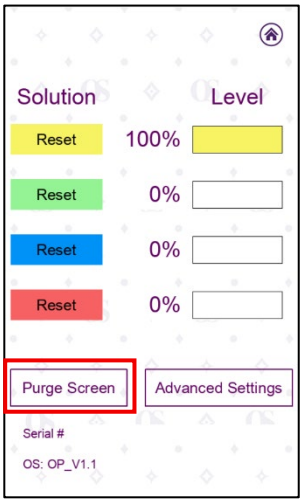

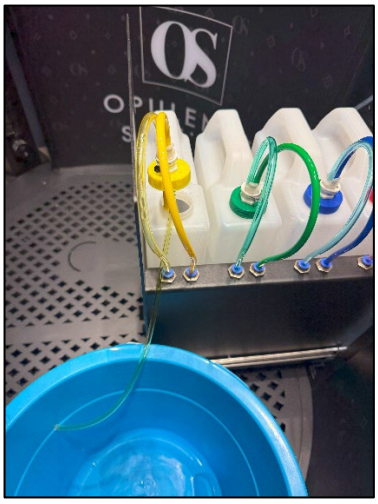

3. Remove the used solution container from the booth drawer and place the transparent colored line in a bucket.
4. Touch “Purge Speed” and type “100” touch “ENT”.
5. If screen shows “Solenoids On” touch it so it shows “Solenoids Off”.
6. Touch the time next to the line set color on the screen you are changing solution for and type in “100” and touch “ENT”.
7. Touch “Start” for the line set color you have set time for. This will purge the line of all pervious solution type into the bucket.



Copyright © 2026 Opulence Sunless, LLC All rights reserved.

8. Place the opaque colored line into a container of flush and touch start. This will fill the line with flush solution to clean out any of the previous solution.
9. Remove the opaque colored line from flush container and click start. This will expel all the flush solution into the bucket.
10. Now you are ready to put your new solution container in. Place the colored line into the new solution container and click “Start”. This will fill the lines with the new solution.
11. Once the final purge is complete, you can place both the lines into the solution container and screw down the cap assembly. Close the drawer.
12. If you have switched solution to a Prep/Post.
    a. Touch the Pump Speed Page.



    b. Touch the pump speed for all 3 levels that matches the colored line set you put the pre/post in and set them to 50%.

Before



After



    c. Touch Purge Screen
13. Repeat starting at step 3 if you need to add a second pre/post solution; if not, click the back arrow twice to return to the main screen.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.


Session Operations

Guests should be given a hair net, sticky feet, and barrier cream to help prevent DHA from staining their hair, bottom of feet, and the palms of their hands. For added protection and safety, Opulence Sunless, LLC and/or your distributor offer protective undergarments, nose filters, eye shields, and lip balm for guests to use.


Manual Session

1. To run a manual session, go to the touchscreen and touch “Manual”.

Home Screen

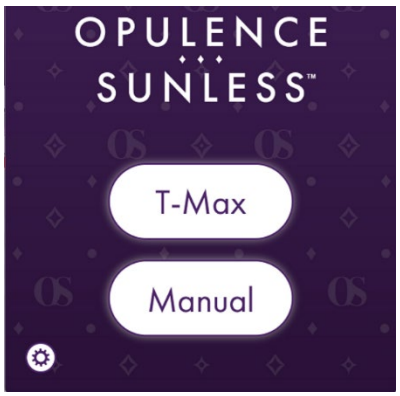


Manual Mode Standby Screen

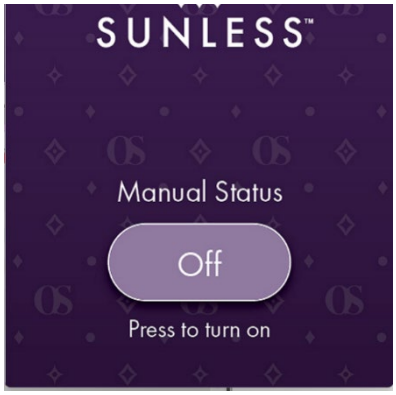

2. Click the “Off” button to switch the booth on.
3. Now click the arrow in the bottom right corner of the screen and enter Spa password. Choose “Automatic”. Select the solution type and level of spray, then click Confirm. The booth will run the compressor for a few seconds to clear the spray nozzle, and the “Start” button will start to flash.
4. Have the guest step inside booth and they can press the white “Start” button on the right side of the booth to begin their spray session.

Note: The guest can click the “Start” button on the screen and then step in the booth

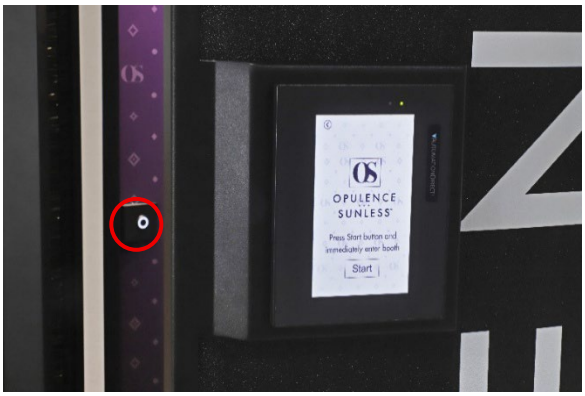

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

T-Max Session

Running a session in the AB1 from the T-Max manager is done the same way as with any other equipment. The AB1 will need to be set to T-Max on the touch screen. From the home screen touch T-Max and enter the spa password.

Once the AB1 has been set from the T-Max manager/POS, send the guest back to the room. Have the guest step inside the booth, and they can press the white “Start” button on the right side or the screen on the outside.

Home Screen



T-Max Standby Screen



If you are using a POS software, please contact the manufacturer for assistance in setting up the AB1.

The session is set using minutes on the T-Max manager.

Minutes and Solution/Level table

SOLUTION **LINE/CAP COLOR**		**1** **YELLOW**	**2** **GREEN**	**3** **BLUE**	**4** **RED**	**1, 2**	**1, 3**	**2, 4**	**3, 4**	**1, 2, 4**	**1, 3, 4**
LEVEL	1	11	21	31	41	14	17	24	27	34	37
	2	12	22	32	42	15	18	25	28	35	38
	3	13	23	33	43	16	19	26	29	36	39

Note that the minutes do not reflect actual time of the session.


Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Spray in Progress

The Airbrush will start at the top and make its first pass down the right side of the body. Instruct the guest as the Airbrush reaches their face, they should gently close eyes, relax face, and hold their breath. (1-2 seconds) Once past, they can open their eyes and breathe normally. Let the guest know never to touch the airbrush arm, as this could cause damage or inconsistent spray results.

Note: The positions shown in the following four photos are for illustrative purposes only. Please have the guest undress to their personal level of comfort. Any areas of skin that remain covered will not receive solution

Heel position for outward facing positions 1 - 3

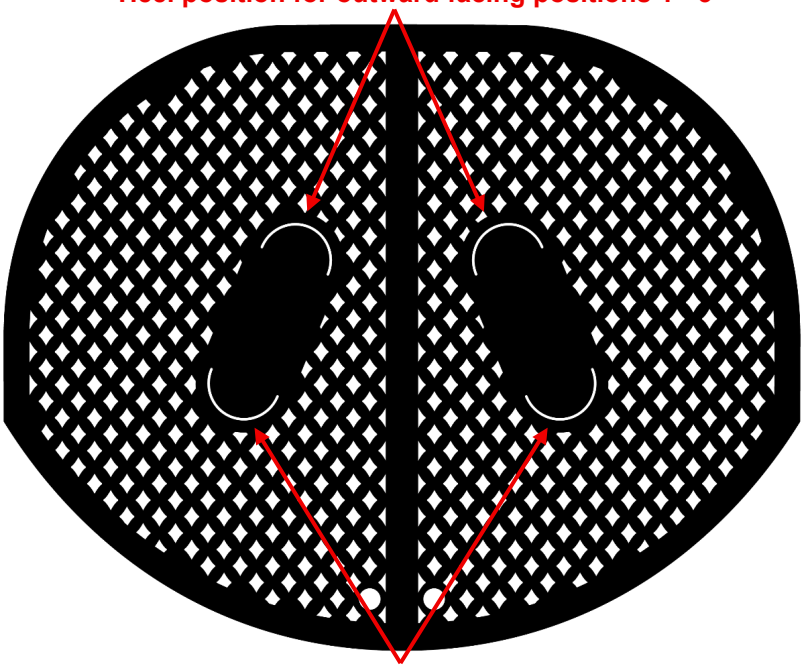

Heel position for inward facing position 4

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Position 1

1. Face forward with your heels at the rear of the indicated foot positions.
2. The voice guide will let the guest know:
   “Relax and hold your arms approximately 4 inches out directly at your side. Slightly twist arms forward so that your palms are facing towards the back of the booth. Slightly curl your fingers and lightly bend your knees and lift your chin. Your Opulence Session is about to start in three, two, one.”



Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Position 2

1. The voice guide will let guest know:
   “Raise your right arm high overhead with your elbow slightly bent and your forearm facing forward.”
2. The voice guide will let guest know:
   “Return right arm to its original position. Please breathe normally and feel free to open your eyes.”



Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Position 3

1. Once the final pass is made the guest will be notified for the left under arm pass.
2. The voice guide will let guest know:

   “Raise your left arm high overhead with your elbow slightly bent and your forearm facing forward.”



Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Position 4

1. Once the left underarm pass is completed, the guest will turn around and face the center back of the booth with their heels at the rear of the indicated foot positions.
2. The voice guide will let guest know:
   “Please turn around and face the center back of the booth with your heels at the rear of the indicated foot positions. Relax and hold your arms directly by your side with your hands parallel to the floor. Your rear session is about to start in three, two, one.”
3. The airbrush will make 5 passes across the back, moving towards the left. Each pass will start at the top, traveling down, and will have warm air drying as it moves to the next position. Once the last pass is completed, the guest can exit the spray booth. If they feel they need additional drying time, the fans and heat will remain on for an additional 30 seconds.



Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Post Manual Session

Once the guest has completed their airbrush session they will dispose of all used accessories. Redress into loose fitted clothing and exit the service room.

A staff member then will spray and wipe down the booth walls and floor of any excess solution with a disinfecting cleaner. Once cleaned press and hold the “Reset” button on the screen for 3 seconds.

Note: To fully power down AB1 unplug the power cable from the wall outlet.

Post T-Max Session

Once the guest has completed their airbrush session they will dispose of all used accessories. Redress into loose fitted clothing and exit the service room.

A staff member then will spray and wipe down the booth walls and floor of any excess solution with a disinfecting cleaner. Once cleaned press and hold “Reset” button on the screen for 3 seconds.



Copyright © 2026 Opulence Sunless, LLC. All rights reserved.


Maintenance & Cleaning

Cleaning Filters

The AB1 will display a “Clean Filter” warning every 50 sessions. This is to remind staff to clean the base and side extraction filters. Other filters require periodic maintenance as outlined below.

Base Filter


Location: Under the foot plate.

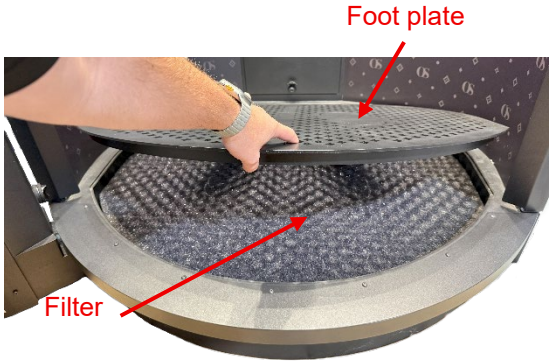

1. Removal: Insert fingers into the two front holes of the foot plate and lift. Set the foot plate aside. Remove the single black filter from the base.
2. Cleaning: Rinse in a wash tub or mop sink until water runs clear.
3. Drying:
    - Best practice: Leave overnight to air dry and reinstall the next day.
    - Immediate use: Shake and pat dry before reinstalling.

Side Extraction Filters

Location: Left and right sides of the booth.

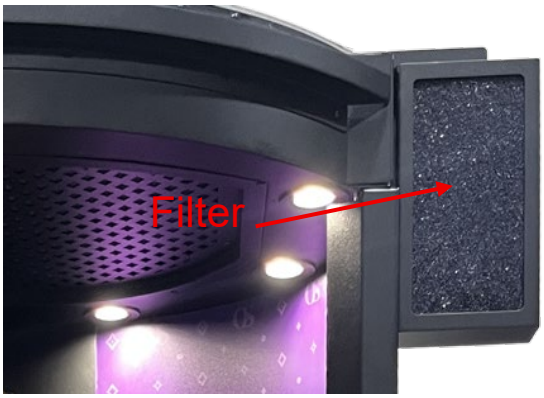

1. Removal: Grip the filter in the center and pull towards you.
2. Cleaning: Rinse in a wash tub or mop sink until water runs clear.
3. Drying:
    - Best practice: Leave overnight to air dry and reinstall the next day.
    - Immediate use: Shake and pat dry before reinstalling.

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Interior Top Filter (Every 6 Months)


Location: Inside the booth, top panel.



1. Removal: Remove the 4 screws securing the top filter grate, then set the grate aside.
2. Cleaning: Rinse in a wash tub or mop sink until water runs clear.
3. Drying:
4. Best practice: Leave overnight to air dry and reinstall the next day.
    - Immediate use: Shake and pat dry before reinstalling.

Top Exterior Filter (Every 6 Months)

Location: On top of the AB1 (ladder required).

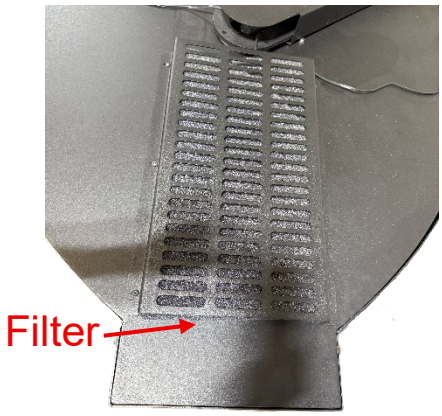

1. Removal: Pull filter out from the back of housing.
2. Cleaning: Rinse in a wash tub or mop sink until water runs clear.
3. Drying:
    - Best practice: Leave overnight to air dry and reinstall the next day.
    - Immediate use: Shake and pat dry before reinstalling.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Cleaning the Airbrush Nozzle

The AB1 features a custom 4-part airbrush nozzle that requires weekly cleaning (or as needed) to ensure optimal performance. Follow the steps below for proper care:



Nozzle Housing | Nozzle Tip | Air Cap | Air Cap Ring

Steps to Clean the Airbrush Nozzle

Ware gloves during cleaning to avoid skin contact with solutions.

1. Remove the Air Cap Ring
    a. Unscrew the Air Cap Ring from the nozzle housing and set it aside.
2. Remove the Air Cap
    a. Carefully wiggle the Air Cap free from the housing and set it aside.
3. Remove the Nozzle Tip
    a. Unscrew the Nozzle Tip from the housing using your fingers.
4. Rinse All Nozzle Parts
    a. Rinse the Air Cap Ring, Air Cap, and Nozzle Tip in warm water.
    b. Ensure there is no blockage in any of the parts.
    c. Check: Hold the Nozzle Tip up to the light — you should see light passing through once it's clean.
5. Clean the Nozzle Housing
    a. Wipe away any excess solution or residue from the nozzle housing.
6. Reinstall the Nozzle Tip
    a. Screw the Nozzle Tip back into the housing.
    b. Do not overtighten — stop at the natural stopping point (finger tight).
7. Reinstall the Air Cap
    a. Insert the Air Cap into the housing, ensuring it is vertically positioned.
8. Reinstall the Air Cap Ring
    a. Screw the Air Cap Ring back on carefully.
    b. Ensure threads are properly aligned to avoid cross-threading.



Tip: Regular cleaning prevents clogging, maintains even spray patterns, and extends the life of the nozzle.

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Maintenance & Cleaning Checklists

Weekly Airbrush Nozzle Cleaning

Date performed					

Every 6 Months Filter Cleaning

Date performed					
Remove and rise Interior top filter					
Remove and rise exterior top filter					

Every 50 Sessions Filter Cleaning

Date performed					
Remove and rinse base filter					
Remove and rinse side extraction filters					

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Tips for a Flawless Glow

Whether you are getting ready for a vacation, event, or just love a sun-kissed glow, following the right prep and aftercare steps is essential to getting the most out of your session. Here is how to make your tan last longer, look more even, and fade beautifully.

Follow these tips alongside protective measure outlined on page 10 to comply with FDA recommendations.

Before Your Session – Pre-Tan Prep

1. Exfoliate the Day Before

   Gently exfoliate your skin with a spa-grade exfoliator before your appointment. This helps remove dead skin cells, creating a smooth, fresh surface for the tanning solution to absorb into. Don't forget to complete all shaving before your tan as well.

2. Hydrate Inside and Out

   Hydration is key to a long-lasting tan! Drink plenty of water and keep your skin moisturized with a spray tan-safe lotion leading up to your session. Well-hydrated skin holds onto color more evenly.

3. Day of - Clean Skin

   Before your appointment, make sure your skin is completely clean and dry. Remove all lotions, deodorants, perfumes, and makeup, as these can interfere with how the solution applies and develops.

4. Dress for Success

   Wear loose, dark-colored clothing to your appointment—think soft cotton pants and a flowy top. After your tan, avoid anything tight or restrictive like bras, leggings, or closed-toe shoes, as they can cause lines or streaks while your tan sets.

After Your Session – Post-Tan Care

1. Avoid Water and Touching

   For the first few hours after your session, avoid sweating, water, or skin-to-skin contact. Let your tan develop without interference for best results.

2. Shower Time Matters

   Wait at least 4 to 8 hours before rinsing off the solution—always reference specific instructions for the product used. When showering, use cool water only and pat dry gently with a towel—no rubbing!

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

3. ## Stick to Tan-Safe Products

   To maintain your glow, use body wash and moisturizers that are specially formulated to be spray tan-safe. These will help the tan last longer and fade evenly.

4. ## Avoid Premature Fading

   Remember, your tan is temporary. Help it last by avoiding hot showers, baths, chlorinated pools, excessive sweating, or frequent shaving. This can all cause your tan to fade faster and unevenly.

By following these simple tips, you'll enjoy a radiant, streak-free glow that lasts. Happy tanning!

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.

Troubleshooting Guide

Before troubleshooting, ensure the boot is unplugged for safety.

If you experience any issue or malfunction with you booth, refer to the list below for quick, helpful tips. For any problems you cannot resolve please contact Opulence Sunless Technical Support at (651) 603-4411 or support@opulencesunless.com.

Power Issues

Booth has No Power / Will Not Turn On

1. Check if the main breaker for the outlet is tripped.
2. Ensure the booth plug (AB1) is fully inserted into the wall outlet.
    a. Check if the booth breaker is tripped.
        i. Unplug the booth.
        ii. Remove the side panel next to the screen.
        iii. Remove the brain box cover and reset the breaker.
        iv. Replace all removed panels before plugging the booth back in.
3. Have a certified electrician inspect and replace the wall outlet if needed.
4. Defective internal breaker → Call Opulence Sunless Support.
5. Faulty 24V power supply → Call Opulence Sunless Support.

Touchscreen is Black

1. Unplug the booth.
2. Remove the side panel next to the screen.
3. Check all cable connections to ensure they are tight.
4. Replace all removed panels before plugging the booth back in.
5. Defective touchscreen → Call Opulence Sunless Support.

Solution Issues

Leaking Solution from Nozzle Housing

1. Remove air cap ring and air cap
2. Tighten the nozzle tip.
3. Reinsert air cap and tighten air cap ring.

Leaking Solution from Drawer

- Check that all solution caps are tightly sealed.
- Check all solution quick-disconnects and press them in firmly.
- Check all solution tubes to ensure they are fully seated in their push fittings.

Copyright © 2026 Opulence Sunless, LLC All rights reserved.

Session Results are Speckling or Blotchy

- Check the nozzle tip for blockages.
- Check the air cap for blockages.
- Ensure the air cap ring is tightened.
- Inspect for air leaks and repair as needed.

No Solution Spraying

1. Verify there is solution in the container → Replace if empty.
2. If the pump is not running, contact Opulence Sunless Support.

Air System Issues

1. Check if compressors are running.
    a. If not, check and replace the fuse.
    b. If yes, check all air hoses for secure connections and leaks.
        i. If leaks are found → repair them.
        ii. If no leaks and still not working → Contact Opulence Sunless Support.

Copyright © 2026 Opulence Sunless, LLC. All rights reserved.